



POOJA INTERNATIONAL

EASY MAINTENANCE MORE PROFIT...

AN ISO 9001:2008 Certified Organisation

AN MSME Company



Since 1990



Hydraulic and Pneumatic Equipments

Tools and Tackles ♦ Bearing Maintenance Tools

Industrial Cleaning Equipments ♦ Material Handling Equipments


Refineries & Oil Industries | Petrochemicals | Fertilisers/ Chemicals | Power Plants

Steel Plants. | Mining & Cement Ind. | Aviation / Naval Base. | Railways & Paper Ind.



HYDRAULIC JACKS , HYDRAULIC , HAND PUMPS & ELECTRIC PUMPS

- Single Acting / Double Acting
- Aluminium cylinder
- Low height cylinder/ Lock nut cylinder
- centre Hole cylinder/ Compact cylinder,
- Capacity: 5Ton to 1000 Ton
- Hydraulic Pumps(Motorized / Pneumatic / Hand Pump)
- Pullers Capacity : 10 Ton to 50 Ton

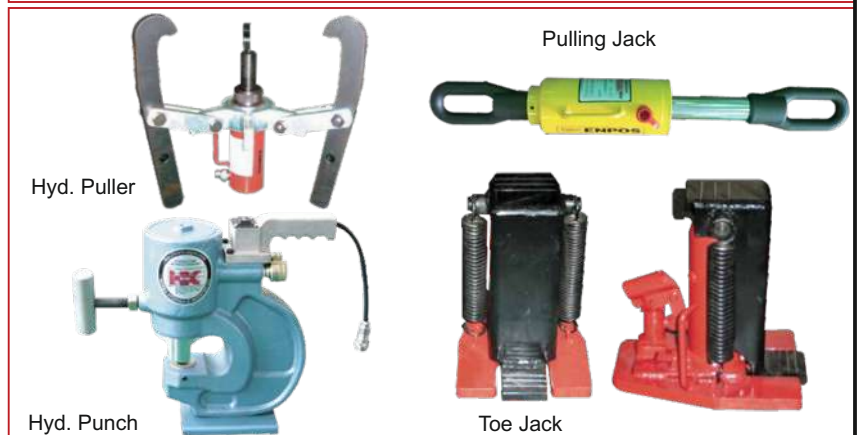

HYDRAULIC TORQUE WRENCH

- Torque (N.M): 112-72,000
- Bolt size (M): 14-125
- Moc: Aluminium, Titanium alloy
- Square Drive: 3/4", 1", 1-1/2", 2-1/2"
- IBT series : 10 models available
- LOW series : 5 models available



HYDRAULIC BOLT TENSIONER

- Bolt size (M): 3/4 - 5.3/4 inch
- 20 - 150mm
- JJT: 12 Models available



AIR / ELECTRIC HYDRAULIC PUMP



Drive	Electric	Electric HNP series	Air
Tank capacity	8L	8L	8L
Flow(low-mid-High)	7-1.6-0.8 L/min	0.8L/min	7-1.6-0.8 L/min
Output pressure	40~700bar	1600bar 2000bar 2500bar	40~700bar
Source of power	220V/50HZ	220V/50HZ	—
Air in	—	—	4~8bar
Power	1.1KW	1KW	1.1KW
Weight	26.7Kg	26.5kg	20.5Kg
Volume	300 x 375 x 458		281 x 428 x 448



HYDRAULIC PRESS

Unique

MADE IN INDIA



H/Workshop type



C type

Note: Also available C type please ask for specification

- Capacity:ST - 300T
- Higher Size available
- Hydraulic cylinder & Hand Pump/ Power pack with Hose : ENPOS KOREA MAKE

HYDRAULIC PULLER



MADE IN TAIWAN

MECHANICAL EASY PULLERS(2,3 WAY)



Capacity	Model No.	Reach (Max.mm)	Spread (Max.mm)	Weight (kg)
2 Ton	PM50(3 jaws)	80	120	1.3
2 Ton	PM52(2 jaws)	80	120	0.9
5 Ton	PM100(3 jaws)	160	250	3.7
5 Ton	PM102(2 jaws)	160	250	3.1
10 Ton	PM150(3 jaws)	230	380	8.8
10 Ton	PM152(2 jaws)	415	380	6.7

- 2/3 Jaws Combination Puller Bearing separator & Stud Arm.
- Capacity: 4Ton to 30 Ton

HYDRAULIC PULLERS



Capacity	Model No.	Reach (Max.mm)	Spread (Max.mm)	Stroke (mm)	Weight (kg)
4 Ton	PM 400	185	255	60	4.5
6 Ton	PM 600	220	330	70	5.5
8 Ton	PM 800	230	350	85	6.5
10 Ton	PM 1000	230	350	85	6.9
12 Ton	PM 1200	270	375	85	8.0
15 Ton	PM 1500	270	375	85	8.0
20 Ton	PM 2000	300	520	111	22
30 Ton	PM 3000	300	550	111	32

HYDRAULIC PULLERS WITH BEARING SEPERATOR



Capacity	Model No.	Reach (Max.mm)	Spread (Max.mm)	Stroke (mm)	Weight (kg)
4 Ton	PM 420	185/250	255/110	60	4.5/8.5
6Ton	PM 620	220/270	255/110	70	5.5/11.5
8 Ton	PM 820	230/270	350/220	85	6.5/12.6
10Ton	PM 1020	230/270	350/220	85	6.5/12.6
12Ton	PM 1220	270/380	375/290	85	8.0/18.0
15 Ton	PM 1520	270/380	375/290	85	8.0/18.0

SELF CENTERING PULLERS

MADE IN USA

Mechanical Pullers



- Capacity:1T to 40T
- 16 Models Available
- 2/3 Jaws



Hydraulic Pullers

- Capacity:5T to 50T
- 10 Models Available
- 3 Jaws





HYDRAULIC AND BATTERY OPERATED CRIMPING TOOLS

Hydraulic crimping tool with separate Pump

- Range- 16mm² to 1000mm²
- Capacity : 10T - 55T

Terminals 16mm -1000mm



CO-630A CO-630B CO-1000

Hydraulic crimping tool with inbuilt Pump

- Range- 16mm² to 500mm²
- Capacity : 10T - 17T



Ti-Tanium CYO-240 (opener type)

Battery operated

- Range- 16mm² to 400mm²
- Capacity : 10T



REC-400

HYDRAULIC NUT SPLITTER

- Nut size A/F - 13mm to 75mm
- Tonnage Capacity-5 Ton to 90 Ton
- 7 Model available



HYDRAULIC FLANGE SPREADER

- Hydraulic Flange Spreader - 5 Ton & 10 Ton
- 2 Models available
- LOCATING PIN TYPE



WEDGE TYPE

- Capacity 15T & 25T
- 3 Models available
- WEDGE TYPE



IMPACT WRENCH PNEUMATIC

- Square Drive : 3/8", 1/2", 3/4", 1", 1-1/2", 2", 2-1/2"
- Bolt Range: (M) 5 - 110
- Working Torque Nm : 24 -8790
- Ultimate Torque Nm : 118 - 26370
- working pressure : 6 Bar
- 31 Models available



DP-36

DP-255BG

ELECTRIC TORQUE WRENCH

- Square Drive : 3/4", 1", 1-1/2", 2-1/2"
- Bolt Size Range: (M) 12 - 48
- Torque Range Nm : 100 -10,000
- Voltage :230V, 50HZ
- Max Power consumption (w): 1650-28000
- 11 Models available



ELECTRIC TORQUE WRENCH

- Square Drive : 3/4", 1", 1-1/2"
- Torque Range: (clockwise)Nm 75 - 10,800
- Torque Range (Anti clockwise) Nm : 780 -13,000
- Working pressure: 6





HAND TOOLS



MADE IN USA

- ◆ TOOL STORAGE
- ◆ MASTER SETS
- ◆ PROFESSIONAL RATCHET AND SOCKET SETS
- ◆ RATCHETS AND DRIVE TOOLS
- ◆ IMPACT AND POWER SOCKETS
- ◆ WRENCHES
- ◆ PRECISION TORQUE TOOLS
- ◆ SCREWDRIVERS AND NUTDRIVERS
- ◆ HAND SOCKETS AND SETS
- ◆ PRY BARS
- ◆ STRIKING AND STRUCK
- ◆ CLAMPS AND LIFTING EYES
- ◆ SPECIALTY TOOLS

INSULATED TOOLS VDE INSULATED TOOLS

MADE IN GERMANY


- ▶ Induction hardened precision cutting
- ▶ Dual compound handles with soft non-slip inlays
- ▶ Matt chrome finish

- ▶ For safe working on electrical appliances up to a voltage of 1000 V. Our tools correspond to EN/ IEC 60900"
- ▶ Hot drop forged special alloy steel, oil hardened



ADJUSTABLE SPANNER

MADE IN SPAIN

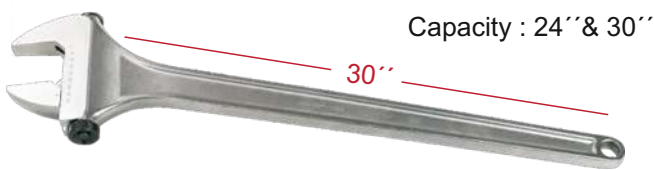

Capacity : 24'' & 30''

30''



WO92-Supper Wide Opening

Capacity : 6'' & 8''
6 Models available



Xtra slim jaws

Capacity : 6'' & 8''
4 models available

insulated handle wrenches-1000V



Capacity : 6'', 8'', 10'', 12'', 15''
7 models available



Non sparking Tools

- ▶ Non Sparking, Non Magnetic corrosion resistant tools
- ▶ Range : Sockets & Accessories, Ring & open end spanners, Hammering Spanners, Screw Drivers, Pipe Wrench, Hammer, chisel, Files, pliers & other tools
- ▶ Moc: copper Beryllium & Aluminum Bronze



Special Heavy Duty Tools

MADE IN INDIA

- ▶ Heavy Duty ring spanner, Open End Spanner, Offset Spanner
- ▶ Torque wrench
- ▶ Torque multiplier
- ▶ Heavy Duty Sockets 8mm to 200mm
- ▶ Custom Design Sockets Available
- ▶ Spring Balancer Capacity 2kg to 200kg





BEARING MAINTENANCE TOOLS

SPIRAL HEATER

- Dia Range :50mm.to 100mm with 1 & 1.75 KW coil.



BEARING FITTING TOOL KIT

- Dia Range :10 to 60 mm.& 10 to120(OD)
- Tool kit comprise 3 impact sleeves
- 33 impact rings,
- made up of UHMW-PE
- Dia Range : 10 to 120(OD)
- 4 impact rings
- 36 rings

Unique MADE IN INDIA



BEARING INDUCTION HEATER

- 3.5 KVA to 40 KVA
- Data Required for offer
- Min. Bore Dia, Max O.D of job
- Width & Weight of job
- Max. Temp 400 C

STANDARD TYPE



NOTE: INNER RACE REMOVER ALSO AVAILABLE

SPECIAL TYPE



PRODUCT DATA	UIH 2000	UIH 2001	UIH 2002	UIH 2003	UIH 2004	UIH 2001SPL	UIH 2002SPL	UIH 2003SPL
Diameter (mm) Bearing	20 to 300	20 to 300	20 to 400	60 to 500	60 to 900	20 to 400	20 to 550	60 to 650
Bearing Weight	40Kg	32 Kg	50 Kg	70Kg	700/1200 Kg	105 Kg	125 Kg	300Kg
Power	2.0 / 2.6 KVA	3.5 / 4.0 KVA	6.0 / 8.0 KVA	11 / 16KVA	25 / 40 KVA	3.6 / 4.6 KVA	4.6 / 6.0 KVA	10.5 / 11KVA

HIGH PRESSURE CLEANERS AND VACUUM CLEANERS

MADE IN ITALY

Model	operating pressure (max pressure) bar (max bar)	delivery rate l/h	absorbed power W
EQ	140	400	2100
DANVBIO 2015	200	900	700
MISSISSIPPI 1310 XP	130(max150)	600	3000
LKX 2015 XP RA	30+200	450+900	7300

LAVOR



Model	Voltage	Motor power	Air suction	Tank capacity
	V - Hz	W / W max	l/s	l
VENTI	230V-50Hz	1400/1600	70l/s	20 l
GNX 32	230V-50Hz	1200/1400	50l/s	30 l
DOMUS IR	230V-50Hz	2000/2400	108l/s	78 l
TAURUS IR	230V-50Hz	3000/6000	162l/s	78 l



MATERIAL HANDLING EQUIPMENTS

Unique

MADE IN INDIA



Hydraulic scissor Lifts

Aerial working plan

		Light weight
CAPACITY (KG)	300 to 500 kg	125 to 300 kg
MAX Working HT	6.5m to 20m	6.5m to 14m
MAX LIFT HT (From Ground)	5m to 18m	6m to 12m
Max # of persons	2-3 Person	1 Person

AC.Powered/ DC Powered / Electrical
Can be customized as per requirement

Hydraulic Hand Pallet Truck

Model No.		ND-2500	ND-5000
Capacity	kg	2500	5000
Min. Fork Height	mm	85	85
Max. Fork Height	mm	195	195
Lifting Height	mm	110	110
Fork Length	mm	1150	1150
Single fork width	mm	160	160
Width overall Forks	mm	550	550



Hydraulic floor crane

Model	Capacity	Max.Lift 'ML'	Min. Height 'MH'	Max. Dist. betw.Legs 'DL'	Weight (appx)
	Tons	MM	MM	MM	Kgs.
UMC-1	1	2350	300	1025	95
UMC-2	2	2500	300	1150	125
UMC-3	3	2600	300	1150	135



MANUAL SCISSOR LIFT

- Max Lift 2 M
- Capacity 300kg to 1000kg



AC/DC STACKERS

- Capacity 500kg to 2000kg
- Lift ht. as per requirement



DRUM STACKER LIFTER

- Capacity 300kg to 1000kg
- Lift : 1.5m to 3m



DRUM TROLLEY/ STD TROLLEY

- Basic capacity from 300 kg
- Best solution for transporting and placing



ASSOCIATED FIRMS:

HP INDUSTRIAL MARKETING AND CONSULTING MAHANT MARKETING SERVICES



STEEL



FERTILIZERS/CHEMICAL



POWER PLANTS



CEMENT/PAPER INDUSTRIES



DEFENCE/OIL/GOVERNMENT ORGANIZATIONS



CONTACT INFO.

Email Id: bharatparikh@vsnl.net
mahantparikh@gmail.com

Phone No's. : 022-28916777
Mobile No's. : 09820020629, 09323811569, 09833951114

Website: www.hpindipooja.com
www.hppooja.com

ADDRESS:

Shop No. 2&3, David Villa CHS. Dr.Govindroa Dalvi Road, Off Jayawant Sawant Road,
Dahisar West, Landmark: Near Rustomjee International School. Mumbai 400068. Maharashtra, INDIA.